
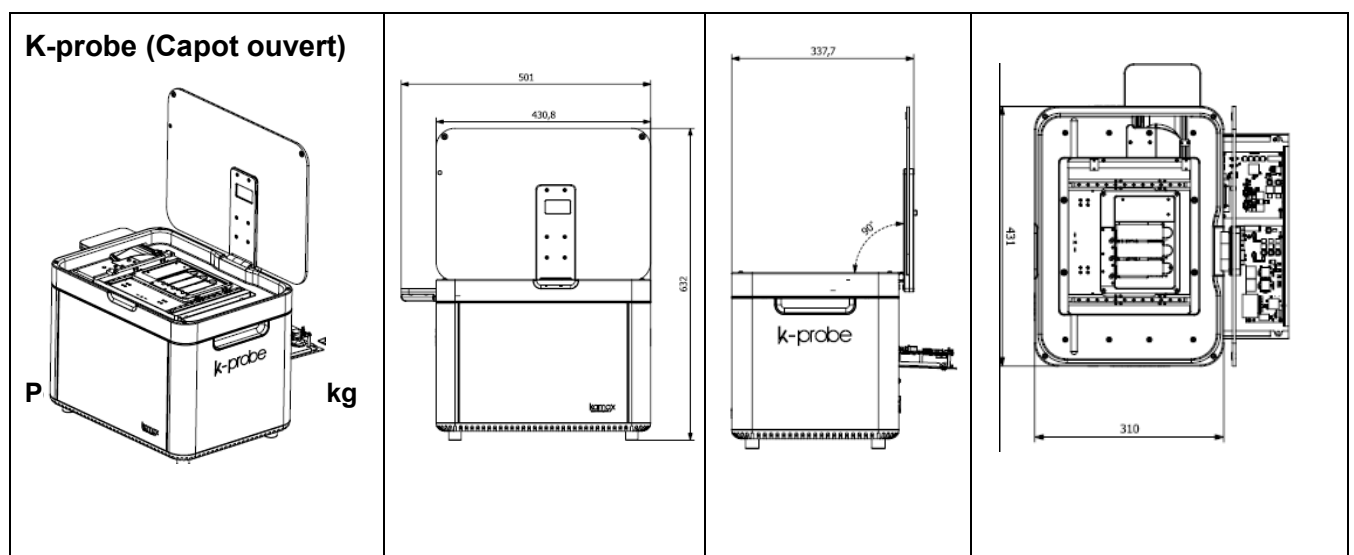


1.1.1 Spécifications

a) Dimensions (en mm)

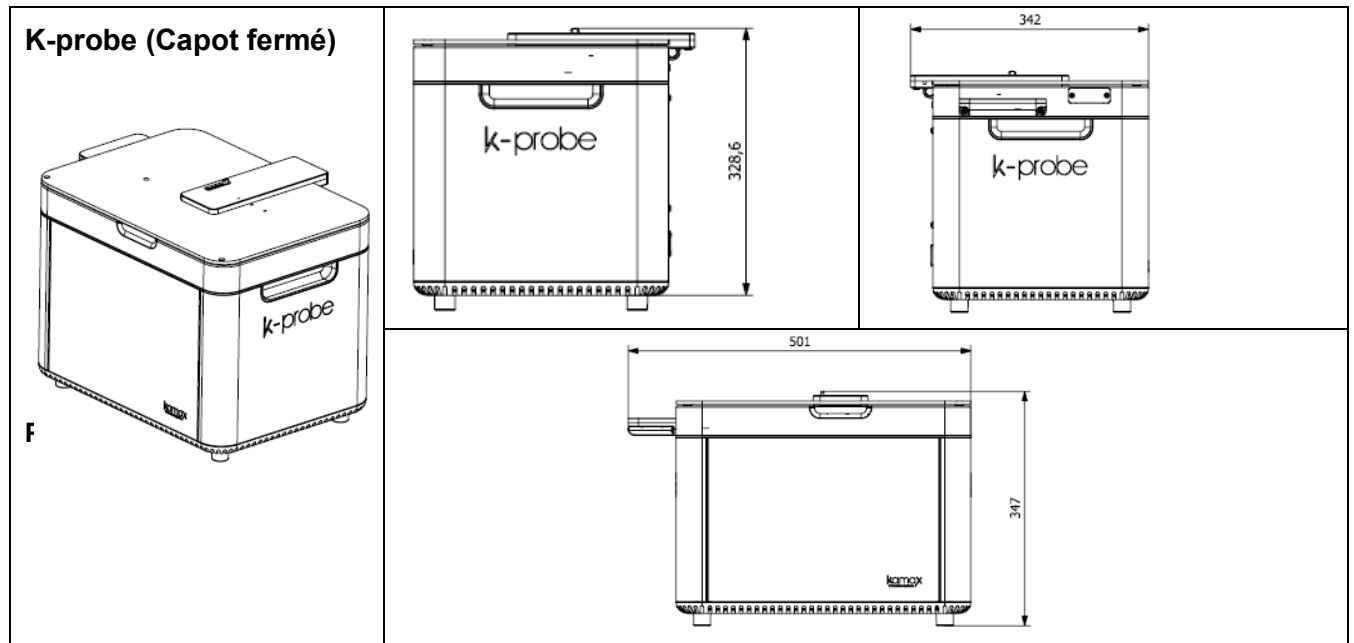

b) Spécifications K-probe

Product name	K-probe XPolar / K-probe	
Product number	KP-01 / KP02	
XPolar Mode (40x) (Only K-probe XPolar)	Image size	SVGA (800pxls X 600pxls)
	Resolution pixel	0.25 µm
Scanning Mode (20X)	Scanning speed: 15 mm × 10 mm	Approx. 190 s
	Resolution pixel	0.18 µm
Preview (4X)	Scanning speed: Full slide 75 mm × 25 mm	Approx. 10 s
Slide capacity	26 mm × 76 mm Glass slide	
Power supply voltage	AC100 V to AC240 V (OVC 2)	
Power consumption	< 150 W	
Safety requirements for electrical equipment	IEC/ EN 61010-1 ; IEC / EN 61010-2-030 / UL 61010-1	
Electromagnetic Compatibility	IEC / EN 61326-1 ; FCC Part 15	
Operating Température	Mini 10°C Maxi 35°C	
Storage Temperature	-10°C to +70°C	
Humidity	< 80% HR without condensation	
Altitude/ Height	< 2000 m	